
SIRCOPV Load break and Isolation switches for photovoltaic applications from 100 to 3200 A, up to 1500 VDC IEC/IS 60947-3







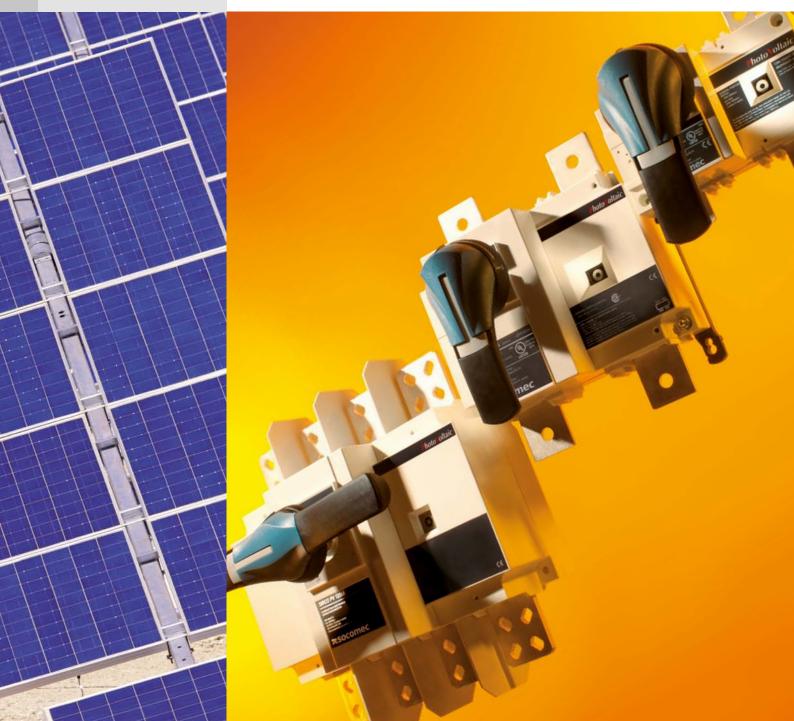

You deserve safe & reliable PV installations

As a PV expert, you are challenged to differentiate yourself from the global competition with geographical disperse markets. Photovoltaic energy producers demand equipment and installations that combine a high production output, consistent reliability and safety with a low maintenance cost. Besides a high-efficiency production, the equipment must support the specificity and technical constraints of the severe environments related to solar applications. Specifically designed for photovoltaic applications, SIRCO PV solar disconnect switches have been tested for use in applications with high performance characteristics that meet or exceed of the latest industry standard requirements.



SOCOMEC - your best asset

European industrial group

- Created in 1922.
- Over 3100 employees.
- Present on five continents.

A culture of independence

- Family shareholders.
- Full control of the decision-making process.
- Respect for human values.

The spirit of innovation

• 10% of turnover is reinvested in R&D.

A flexible manufacturing structure

- Competitive production sites.
- Lean Management.
- Lead times, quality and cost guaranteed.

The vision of a specialist

Expertise in technological modules.
Custom adaptations to customer requirements.

A focus on service

- Advice, interventions, training.
- Teams located across the globe.





SIRCO PV

A complete offer for any photovoltaic application The spirit of innovation combined with proven technology

As an expert in solar switching equipment, SOCOMEC has the specialised know-how for implementing key strategic functions in PV facilities.



Four key applications: the know-how of a specialist

Ensuring the availability and storage of high quality power.



Managing power and protecting persons and facilities.

Managing the energy performance of buildings.



Enabling available, safe and efficient energy.

New patented switching technology to break 500 VDC per pole

Most PV systems today are designed at 1000 VDC. Our new range of switches allow on-load breaking of 1000 VDC on just 2 poles. This innovation provides saving through an extremely compact solution.



Classic solution Example of connection of a 1000 VDC switch.



New With our new range you can break 1000 VDC with just 2 poles.

Optimise your investment


- Limit costs by reducing the number of jumpers per device.
- Gain time by having a less number of jumpers to install.
- Reduce the overall heat dissipation of the switch. A 2 pole SIRCO PV switch takes direct advantage of this, resulting in the **possibility to use a smaller enclosure**.

Limit potential risk

PV equipment is subject to extreme variation in temperature. Point of connection are therefore subject to potential loosening of connection due to breaking cooling effect. Limiting the number of poles greatly reduces the risk of a loose connection.

Allows to disconnect up to 4 circuits with one switch ("The Worlds first")

A compact and cost effective solution for recombiner applications. Allows to break up to 24 circuits while respecting the NEC article 690.



4 MPPT switches, 4 circuits are switched together.




SIRCO PV 350 A 1000 VDC 4 circuits.

Achieving 1500 VDC characteristics in a compact footprint

SOCOMEC's new technology enables utilisation at 1500 VDC by connecting three poles in series.

- Each pole of a switch has a maximum voltage breaking capacity. To break a high DC voltage it is necessary to connect poles in series. The global on-load breaking capacity of a switch is determined by multiplying the max voltage breaking capacity per pole by the number of poles in series.
- Paralleling the poles on our doublestack design permits a higher current rating to be achieved.





SIRCO PV 400 A 1500 VDC.

SIRCO PV 800 A 1500 VDC with a 400 A double stack switch.

4

Benefit from the experience of a world leader in industrial switching

PV applications are one of the most stringent for load break switches. Extreme fluctuations in temperature, condensation, dust, UV exposure and oversized connection cables stress all components. The SIRCO range has been designed to exceed industry standards and our current solutions take into account all of these specific requirements for PV applications.

Ensure safe operation

Guarantee isolation properties over time

Today most photovoltaic systems operate at 1000 VDC with voltages now moving towards 1500 VDC.

Aging of plastic due to high fluctuations in temperature combined with external elements (dust, condensation) may through time increase the risk of electrical breakdown. The creepage distance over insulation material between live parts is key in preventing this. SOCOMEC decided to exceed the requirements of IEC standards and increased this distance from 25 mm to 53 mm.



The mechanism is completely independent from manual operation and provides quick make & quick break operations, thereby reducing the arc duration.

A reliable position indicator clearly shows the true state of the switch contacts.

Long lasting stable materials


SIRCO PV is an extremely robust product, with all casings made from fiber glass reinforced polyester materials that allows:

- high mechanical withstand,high stability to temperatures
- high stability to temperatures (RTI of 130 °C),
- high dielectric performance (high CTI/tested according to ASTM D 2303).


The SIRCO PV range includes a heavy duty range of handles

- Door interlocked the ON position.
- Possibility to defeat the door interlock with the use of a tool.
- Padlockable in the OFF position whilst including a door interlock.
- High index of protection: up to IP65 IEC and 4, 4X UL.
- UV rated.





SOCOMEC design with 53 mm creepage distance over surface. This is true externally as well as inside the switch.



A fully tested range...

Using tested and certified components is key for the success of the design for any photovoltaic system. The SIRCO PV range is tested and certified according to IEC standards used in the photovoltaic industry.


Global approvals

Our SIRCO PV solar load break range meets IEC60947-3 & IS13947-3 Standards and bear the CE mark. SOCOMEC also provide UL98B, CSA and CCC PV switches thereby providing a PV solution that may be used anywhere in the world.



PV critical current

Under particular conditions (cloudy, days, evenings...) PV systems can deliver a low current at high voltage. This type of current is extremely difficult to interrupt. Many AC or DC products available on the market are usually not tested in these specific conditions and could therefore be unable to break low currents at high DC voltage. If the electrical arc produced is not broken it may result in operator injury or fire. The SIRCO PV range has been specifically designed and tested to interrupt the current under all current and voltage conditions.




Current (I)/Voltage (V) curve of a PV system. When the current decreases (in the evening or when cloudy) the voltage may increase. SC = Short-circuit, OC = Open-circuit

Short Circuit

The complete SIRCO PV range is tested to withstand a short circuit of 10 kA for a duration of 50 ms without any specific protection. This allows the use of any overcurrent protection device for line protection.

Thermal current test

Thermal tests have been performed according to IEC international standards.



According to IEC 60947, switches are tested in free air. Maximum temperature elevation on terminals is 70 °K.

SIRCO PV SWITCHES ARE CERTIFIED UP TO 60 °C AMBIENT WITHOUT DERATING

One of Europe's largest power laboratories

Tesla Lab laboratory has guaranteed the reliability and compliance of Socomec products since 1965. Accredited by COFRAC, UL (CTDP), CSA and DEKRA (WMT), it also works in partnership with certification organisations such as ASEFA and LOVAG to ensure that the safety and quality requirements in specific countries are addressed fully.






6


... for all your PV applications


The SIRCO PV range will provide safe disconnection and isolation at all levels of your PV installation.

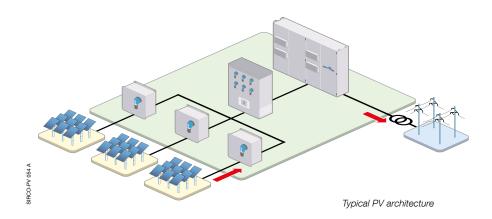



The widest range on the market

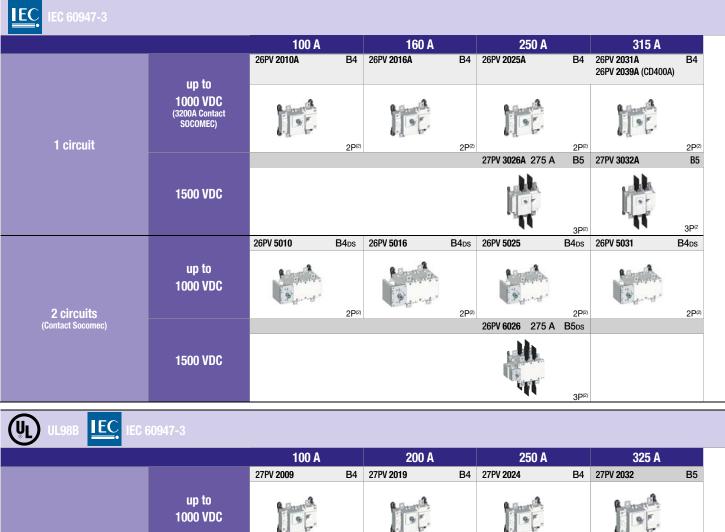


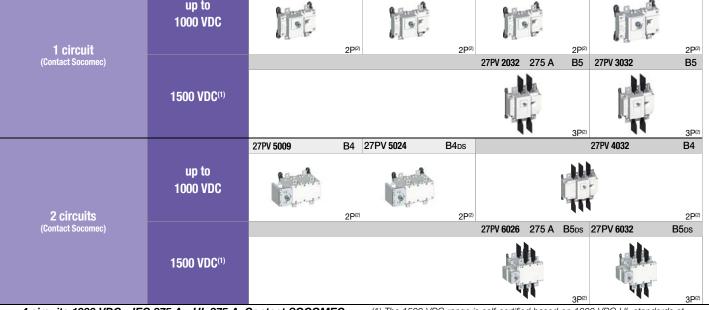

4 circuits 1000 VDC - IEC 275 A - UL 275 A. Contact SOCOMEC. IEC 500 A - UL 350 A. Contact SOCOMEC. 1 circuit 1000 VDC 3200 A. Contact SOCOMEC. The 1500 VDC range is self-certified based on 1000 VDC UL standards at 1500 VDC. The UL standard at 1500 VDC has not yet been released.
 Number of poles to reach the characteristic indicated per PV circuit.



400 A		500 A		630 A		800 A		1250 A		2000 A	
26PV 4040A	B4	26PV 4050A	B4	26PV 4063A	B5	26PV 4080A	B5	26PV 4120A	B6	26PV 4200A	B7
	4P ⁽²⁾		4P								
27PV 3032A	B5	27PV 3039A	B5	26PV 8063A	B5 _{DS}	26PV 8080A	B6 _{DS}	26PV 8120A	B6 _{Ds}	26PV 8200A	B7 _{DS}
	3P ⁽²⁾		3P ⁽²⁾		8P ⁽²⁾	and and	8P ⁽²⁾	and a	8P ⁽²⁾		8P ⁰
27PV 4032	B5	27PV 4039	B5	26PV 8063A	B5 _{DS}	26PV 8080A	B6 _{DS}	26PV 8120A	B6 _{DS}	26PV 8200A	B7 _{DS}
TT	2P ⁽²⁾		2P ⁽²⁾		4P ⁽²⁾	and and	4P ⁽²⁾	and a	4P ⁽²⁾		4P ⁽
27PV 6032	B5 _{DS}	27PV 6039	B5 _{DS}								

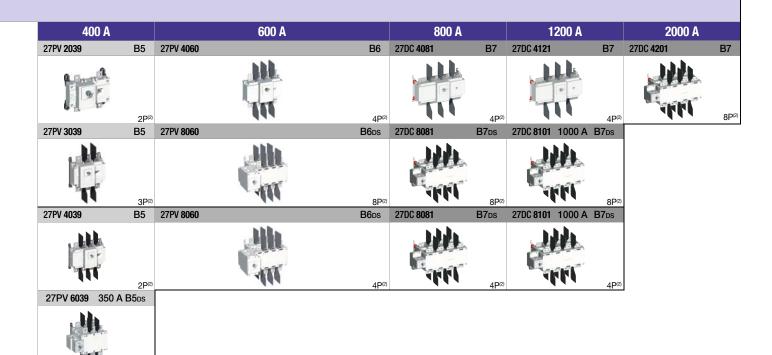

ORDERING INFORMATION:

All references given above are for the SIRCO PV switch body only (Without accessories and without the operating handle). When ordering please make sure to specify a kit reference to define a Direct handle (2XP1 XXXX A) or External handle (2XP2 XXXX A).

3P⁽²⁾

Example for switch type 26PV 2010 A:

The Direct handle kit reference including the SIRCO PV switch and the direct handle is 26P1 2010 A.

The External handle kit reference including the SIRCO PV switch, external shaft and the external handle is 26P2 2010 A.

The **PV** range

A complete offer of load break switches for photovoltaic applications from 25 to 3200 A

SIRCO MC PV from 25 up to 45 A - 1000 VDC

Compact

Thanks to its compact design, the limited space within the combiner box or the solar inverter maybe utilised better.

High breaking capacity up to 1000 VDC

- Making and breaking capacity under load conditions up to 1000 VDC.
- Specific photovoltaic test beyond IEC 60947-3 standard requirements.
- Compliant with UL 508i.

Safety

- Pre-bridging is factory installed for easier, quicker and safer connection.
- Direct access to connection terminals for adequate tightening.

Easy mouting

Three mounting possibilities are available for optium integration and time saving.

- DIN rail or back plate mounting.
- Door mounting.
- Quick Fix mounting to save time when integrating into solar inverters.

Multi-circuit breaking

The SIRCO MC PV for double circuits enables connection of two independent PV panel strings to a single switch. This will reduce the cost of the overall solution.





SIRCO MOT PV up to 3200 A - up to 1500 VDC

Main characteristics

- Up to 1500 VDC.
- 2 stable positions (I, 0).
- AUTO/MANU selector.
- Padlocking in 0 position.
- Full range of accessories.

Remote disconnection system

With its remote motorised control, the SIRCO MOT PV can be utilised to provide safety disconnection for firefighters by meeting the remote disconnection requirements of the installation.

Manual emergency operation

In addition to its motorised operation, the SIRCO MOT PV also includes a manual operation facility, enabling the switch position to be changed on load in a safe and easy way.





INOSYS LBS Load Break Switches incorporating tripping function from 160 to 1250 A, up to 1500 VDC

INOSYS LBS are multiple pole load break switches that have been specifically designed for PV applications that require a tripping function. They can be operated manually using the handle or remotely via tripping coils to disconnect part or all of the electrical installation.

They make and break under load conditions and provide safety isolation for any low voltage circuits up to 1500 VDC and are suitable for emergency switching. To meet the requirements of harsh PV environments, the INOSYS LBS can be easily integrated in any location of the PV installation (combiner box, recombiner box or inverter) and are also particularly suitable for safety applications such as firefighter switches. It's the right choice for PV and DC distribution applications that require a high reliability and low maintenance trip function through a shunt trip coil or an undervoltage release.





C

Also available

SIRCO

Load break switches for power distribution

- From 63 to 5000 A.
- Up to 690 VAC AC23.
- Reliability and performance.
- Simplicity.
- Easy to install.

ATyS

Remotely operated and automatic transfer switching equipment

- from 125 to 3200 A
- plug & play solution
- manual emergency control
- easy maintenance
- compliant with IEC 60947-6-1 & IEC 60947-3



DIRIS

Multifunction meters

- Monitor all electrical parameters of the installation.
- Detects wiring errors.
- Compliant with IEC 61557-12 UL 61010-1.





Socomec worldwide

IN INDIA

CORPORATE OFFICE

B1, II Floor Thiru-VI-Ka Industrial Estate Guindy, Chennai - 600 032 Tel: +91 44 3921 5400 / 5423 / 5466 Mob: +91 9711229933, +91 9790968731 Fax: +91 44 39215450 info.in@socomec.com

MANUFACTURING FACILITY

756 Pace City II Sector 37 Gurgaon - 122 001 Haryana Tel: +91 124 4562700, 4597803 Fax: +91 124 4562733 CIN: U00000HR1999PTC038504

BRANCH OFFICES

BANGALORE

160, Arun Arch, 2nd Floor 9th Cross, Indiranagar First Stage Bangalore - 560 038 Tel: +91 80 41739101-03 Mob: +91 9972578171, +91 9886323448

COCHIN

47/590, Mattathumkattil Narayanan Asan Road Ponnurunni, Vyttila Cochin - 682019 Mob: +91 9745012322, +91 8939550688

COIMBATORE

12, 3rd Cross Street Lakshmipuram, Ganapathy Coimbatore - 641 006 Mob: +91 8939550688, +91 9003032012

HYDERABAD

3rd Floor 6-3-652/K/12, KAUTILYA Complex Somajiguda Hyderabad - 500 082 Mob: +91 9959444277, +91 9642528800

KOLKATA

AK-257, Sector-2 Salt Lake City, Kolkata - 700091 Mob: +91 9836405558, +91 8697709095

MUMBAI

Office No.404, 4th Floor "O" Wing, Neelkanth Business Park Nr. Vidyavihar Station, Vidyavihar (W) Mumbai - 400 086 Tel: +91 9987052602, +91 9167542007

NEW DELHI

Plot No 100,1st Floor Okhla Industrial Estate Phase III New Delhi - 110020 Tel: +91 11 40884000 Mob: +91 9958595941, +91 9953595413

PUNE

Plot No. 30, Wireless Co-operative Society Behind Convergys, Aundh Pune 411 007 Telefax: +91 20 25881587 Mob: +91 9987052604, +91 9423204106

RESIDENT OFFICIES

AHMEDABAD

+91 9727753931 +91 9376639333

CHANDIGARH +91 9023154784

TRIVANDRUM +91 9020179364

VADODARA

+91 9099947988

IN EUROPE

- BELGIUM FRANCE GERMANY ITALY NETHERLANDS POLAND PORTUGAL
- ROMANIA SLOVENIA SPAIN SWITZERLAND UNITED KINGDOM TURKEY

IN ASIA PACIFIC

AUSTRALIA CHINA SINGAPORE THAILAND

IN MIDDLE EAST

UNITED ARAB EMIRATES

IN AMERICA

OTHER COUNTRIES

www.socomec.co.in/worldwide

HEAD OFFICE

SOCOMEC GROUP

SAS SOCOMEC capital 10.686000 € R.C.S. Strasbourg B 548 500 149 B.P. 60010 - 1, rue de Westhouse F-67235 Benfeld Cedex - FRANCE Tel. +33 3 88 57 41 41 Fax +33 3 88 74 08 00 info.scp.isd@socomec.com

www.socomec.co.in

your energy our expertise







YOUR DISTRIBUTOR / PARTNER

USA, CANADA & MEXICO