



SIRCO PV

Load break and Isolation switches
for photovoltaic applications
from 100 to 3200 A, up to 1500 VDC

IEC/IS 60947-3



your energy
our expertise



 **socomec**
Innovative Power Solutions

You deserve **safe & reliable** PV installations

As a PV expert, you are challenged to differentiate yourself from the global competition with geographical disperse markets. Photovoltaic energy producers demand equipment and installations that combine a high production output, consistent reliability and safety with a low maintenance cost. Besides a high-efficiency production, the equipment must support the specificity and technical constraints of the severe environments related to solar applications. Specifically designed for photovoltaic applications, SIRCO PV solar disconnect switches have been tested for use in applications with high performance characteristics that meet or exceed of the latest industry standard requirements.



SOCOMEK - your **best asset**

European industrial group

- Created in 1922.
- Over 3100 employees.
- Present on five continents.

A culture of independence

- Family shareholders.
- Full control of the decision-making process.
- Respect for human values.

The spirit of innovation

- 10 % of turnover is reinvested in R&D.

A flexible manufacturing structure

- Competitive production sites.
- Lean Management.
- Lead times, quality and cost guaranteed.

The vision of a specialist

- Expertise in technological modules.
- Custom adaptations to customer requirements.

A focus on service

- Advice, interventions, training.
- Teams located across the globe.


**ENERGY
SPECIALIST**
SINCE **1922**



SIRCO PV

A complete offer for any photovoltaic application
The spirit of innovation combined with proven technology

As an expert in solar switching equipment, SOCOMEC has the specialised know-how for implementing key strategic functions in PV facilities.

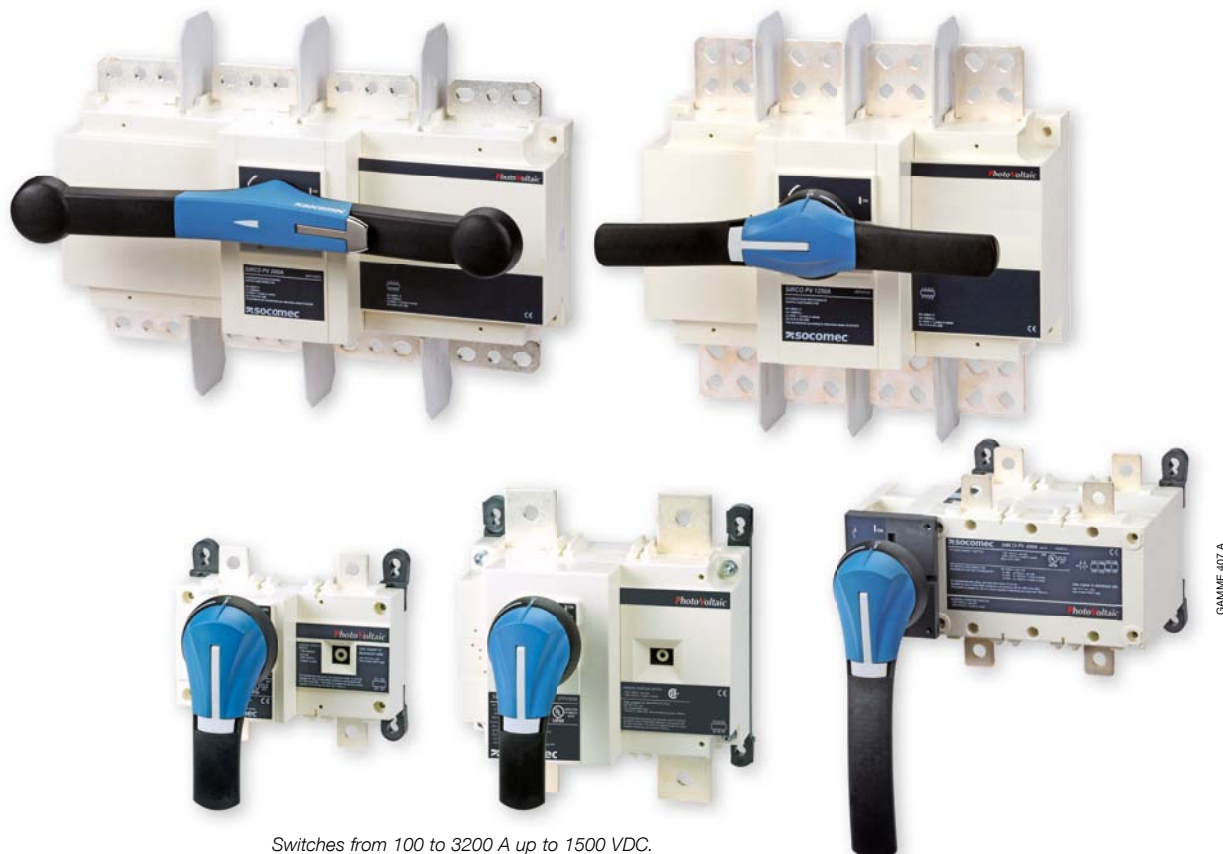

Switches from 100 to 3200 A up to 1500 VDC.

Four key applications: the know-how of a specialist

Ensuring the availability and storage of high quality power.



Managing power and protecting persons and facilities.


Managing the energy performance of buildings.




Enabling available, safe and efficient energy.

New patented switching technology to break 500 VDC per pole

Most PV systems today are designed at 1000 VDC. Our new range of switches allow on-load breaking of 1000 VDC on just 2 poles. This innovation provides saving through an extremely compact solution.

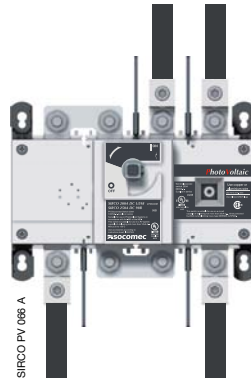

Classic solution
Example of connection of a 1000 VDC switch.

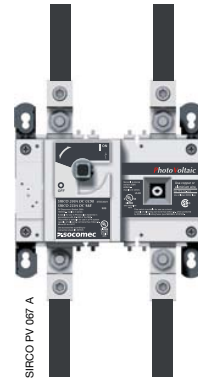

New
With our new range you can break 1000 VDC with just 2 poles.

Optimise your investment


- Limit costs by reducing the number of jumpers per device.
- Gain time by having a less number of jumpers to install.
- Reduce the overall heat dissipation of the switch. A 2 pole SIRCO PV switch takes direct advantage of this, resulting in the **possibility to use a smaller enclosure**.

Limit potential risk

PV equipment is subject to extreme variation in temperature. Point of connection are therefore subject to potential loosening of connection due to breaking cooling effect. Limiting the number of poles greatly reduces the risk of a loose connection.

Allows to disconnect up to 4 circuits with one switch ("The Worlds first")

A compact and cost effective solution for recombinaer applications. Allows to break up to 24 circuits while respecting the NEC article 690.

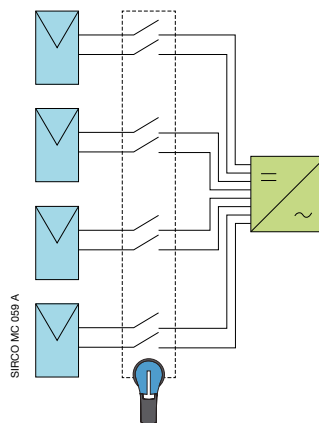

4 MPPT switches, 4 circuits are switched together.




SIRCO PV 350 A
1000 VDC 4 circuits.


Achieving 1500 VDC characteristics in a compact footprint

SOCOMECC's new technology enables utilisation at 1500 VDC by connecting three poles in series.

- Each pole of a switch has a maximum voltage breaking capacity. To break a high DC voltage it is necessary to connect poles in series. The global on-load breaking capacity of a switch is determined by multiplying the max voltage breaking capacity per pole by the number of poles in series.
- Paralleling the poles on our double-stack design permits a higher current rating to be achieved.



SIRCO PV 400 A
1500 VDC.



SIRCO PV 800 A
1500 VDC with a 400 A double stack switch.


Benefit from the experience of a world leader in industrial switching

PV applications are one of the most stringent for load break switches. Extreme fluctuations in temperature, condensation, dust, UV exposure and oversized connection cables stress all components. The SIRCO range has been designed to exceed industry standards and our current solutions take into account all of these specific requirements for PV applications.


■ Guarantee isolation properties over time

Today most photovoltaic systems operate at 1000 VDC with voltages now moving towards 1500 VDC.

Aging of plastic due to high fluctuations in temperature combined with external elements (dust, condensation) may through time increase the risk of electrical breakdown. The creepage distance over insulation material between live parts is key in preventing this. SOCOMEC decided to exceed the requirements of IEC standards and increased this distance from 25 mm to 53 mm.

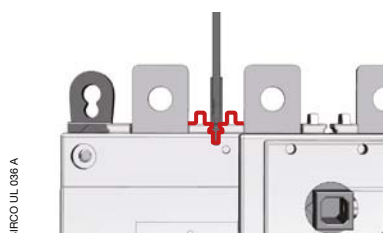

SOCOME C design with 53 mm creepage distance over surface. This is true externally as well as inside the switch.

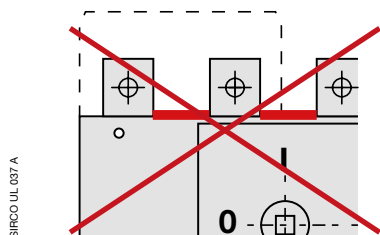

■ Ensure safe operation



The mechanism is completely independent from manual operation and provides quick make & quick break operations, thereby reducing the arc duration.

A reliable position indicator clearly shows the true state of the switch contacts.

■ Long lasting stable materials

SIRCO PV is an extremely robust product, with all casings made from fiber glass reinforced polyester materials that allows:

- high mechanical withstand,
- high stability to temperatures (RTI of 130 °C),
- high dielectric performance (high CTI/tested according to ASTM D 2303).

The SIRCO PV range includes a heavy duty range of handles

- Door interlocked the ON position.
- Possibility to defeat the door interlock with the use of a tool.
- Padlockable in the OFF position whilst including a door interlock.
- High index of protection: up to IP65 IEC and 4, 4X UL.
- UV rated.



A fully tested range...

Using tested and certified components is key for the success of the design for any photovoltaic system. The SIRCO PV range is tested and certified according to IEC standards used in the photovoltaic industry.


Global approvals

Our SIRCO PV solar load break range meets IEC60947-3 & IS13947-3 Standards and bear the CE mark. SOCOMEC also provide UL98B, CSA and CCC PV switches thereby providing a PV solution that may be used anywhere in the world.



PV critical current

Under particular conditions (cloudy, days, evenings...) PV systems can deliver a low current at high voltage. This type of current is extremely difficult to interrupt. Many AC or DC products available on the market are usually not tested in these specific conditions and could therefore be unable to break low currents at high DC voltage. If the electrical arc produced is not broken it may result in operator injury or fire. The SIRCO PV range has been specifically designed and tested to interrupt the current under all current and voltage conditions.




Current (I) / Voltage (V) curve of a PV system. When the current decreases (in the evening or when cloudy) the voltage may increase.
SC = Short-circuit, OC = Open-circuit

Short Circuit

The complete SIRCO PV range is tested to withstand a short circuit of 10 kA for a duration of 50 ms without any specific protection. This allows the use of any overcurrent protection device for line protection.

Thermal current test

Thermal tests have been performed according to IEC international standards.



According to IEC 60947, switches are tested in free air. Maximum temperature elevation on terminals is 70 °K.

**SIRCO PV SWITCHES ARE
CERTIFIED UP TO 60 °C AMBIENT
WITHOUT DERATING**


One of Europe's largest power laboratories

Tesla Lab laboratory has guaranteed the reliability and compliance of Socomec products since 1965. Accredited by COFRAC, UL (CTDP), CSA and DEKRA (WMT), it also works in partnership with certification organisations such as ASEFA and LOVAG to ensure that the safety and quality requirements in specific countries are addressed fully.






... for all your PV applications

The SIRCO PV range will provide safe disconnection and isolation at all levels of your PV installation.

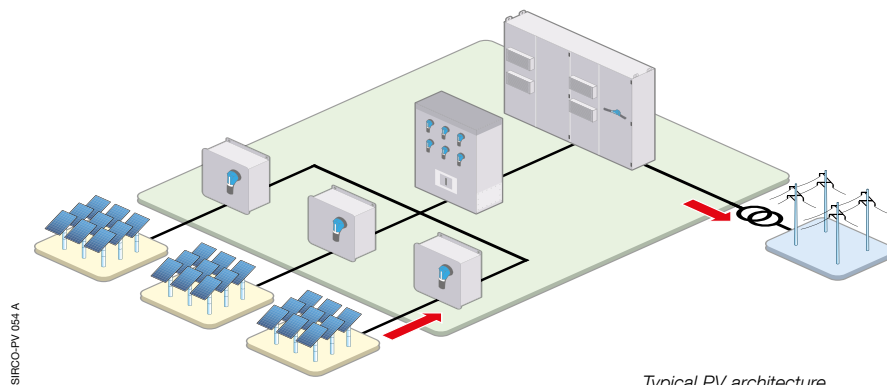

Typical PV architecture

Combiner box 	PV load break switches, manually operated • SIRCO PV, 100 to 3200 A, 1000 & 1500 VDC • SIRCO MV PV, 63 & 80 A, 1000 VDC • SIRCO MC PV, 20 to 45 A, 1000 VDC Fuse holder • RM PV up to 32 A, 1000 VDC PV Fuses • 10x38 PV 1 to 32 A, 1000 VDC Surge protection devices • SURGYS, 1000 & 1500 VDC	
Recombiner box 	PV load break switches for 1 to 4 circuits • SIRCO PV, 100 to 3200 A, 1000 & 1500 VDC PV Fuses and holder • 1 to 600 A, 1000 & 1500 VDC	
Inverter 	PV load break switches, manually operated • SIRCO PV, 100 to 3200 A, 1000 & 1500 VDC • SIRCO MV PV, 63 & 80 A, 1000 VDC • SIRCO MC PV, 20 to 45 A, 1000 VDC PV Load break switches, remotely operated • SIRCO Mot PV, 200 to 3200 A, 1000 VDC AC non fusible and fusible load break switches • SIRCO M, 16 to 125 A, 690 VAC • SIRCO, 63 to 5000 A, 415 VAC • FUSERBLOC, 25 to 1250 A, 690 VAC PV Fuses and holder • 1 to 600 A, 1000 & 1500 VDC Surge protection devices • SURGYS, 1000 & 1500 VDC	

The widest range on the market

Which standard?

IEC IEC 60947-3		100 A	160 A	250 A	315 A
1 circuit	up to 1000 VDC (3200A Contact SOCOMEC)	26PV 2010A B4  2P ⁽²⁾	26PV 2016A B4  2P ⁽²⁾	26PV 2025A B4  2P ⁽²⁾	26PV 2031A B4 26PV 2039A (CD400A) B4  2P ⁽²⁾
		27PV 3026A 275 A B5  3P ⁽²⁾			
	1500 VDC	27PV 3032A B5  3P ⁽²⁾			
2 circuits (Contact Socomec)	up to 1000 VDC	26PV 5010 B4ds  2P ⁽²⁾	26PV 5016 B4ds  2P ⁽²⁾	26PV 5025 B4ds  2P ⁽²⁾	26PV 5031 B4ds  2P ⁽²⁾
		26PV 6026 275 A B5ds  3P ⁽²⁾			
	1500 VDC				

UL98B IEC IEC 60947-3		100 A		200 A		250 A		325 A		
1 circuit (Contact Socomec)	up to 1000 VDC	27PV 2009	B4	27PV 2019	B4	27PV 2024	B4	27PV 2032	B5	
										
		2P ⁽²⁾		2P ⁽²⁾		2P ⁽²⁾		2P ⁽²⁾		
	1500 VDC ⁽¹⁾	27PV 2032 275 A B5						27PV 3032	B5	
										
2 circuits (Contact Socomec)	up to 1000 VDC	27PV 5009	B4	27PV 5024	B4Ds	27PV 4032				B4
										
		2P ⁽²⁾		2P ⁽²⁾					2P ⁽²⁾	
	1500 VDC ⁽¹⁾	27PV 6026 275 A B5Ds						27PV 6032	B5Ds	
										
								3P ⁽²⁾	3P ⁽²⁾	

4 circuits 1000 VDC - IEC 275 A - UL 275 A. Contact SOCOMEC.
IEC 500 A - UL 350 A. Contact SOCOMEC.
1 circuit 1000 VDC 3200 A. Contact SOCOMEC.

(1) The 1500 VDC range is self-certified based on 1000 VDC UL standards at 1500 VDC. The UL standard at 1500 VDC has not yet been released.
 (2) Number of poles to reach the characteristic indicated per PV circuit.

How many
circuits ?

Which
voltage ?

Which
rating ?

400 A		500 A		630 A		800 A		1250 A		2000 A	
26PV 4040A	B4	26PV 4050A	B4	26PV 4063A	B5	26PV 4080A	B5	26PV 4120A	B6	26PV 4200A	B7
	4P ⁽²⁾		4P ⁽²⁾		4P ⁽²⁾		4P ⁽²⁾		4P ⁽²⁾		4P ⁽²⁾
27PV 3032A	B5	27PV 3039A	B5	26PV 8063A	B5Ds	26PV 8080A	B6Ds	26PV 8120A	B6Ds	26PV 8200A	B7Ds
	3P ⁽²⁾		3P ⁽²⁾		8P ⁽²⁾		8P ⁽²⁾		8P ⁽²⁾		8P ⁽²⁾
27PV 4032	B5	27PV 4039	B5	26PV 8063A	B5Ds	26PV 8080A	B6Ds	26PV 8120A	B6Ds	26PV 8200A	B7Ds
	2P ⁽²⁾		2P ⁽²⁾		4P ⁽²⁾		4P ⁽²⁾		4P ⁽²⁾		4P ⁽²⁾
27PV 6032	B5Ds	27PV 6039	B5Ds								
	3P ⁽²⁾		3P ⁽²⁾								

400 A		600 A		800 A		1200 A		2000 A	
27PV 2039	B5	27PV 4060	B6	27DC 4081	B7	27DC 4121	B7	27DC 4201	B7
	2P ⁽²⁾		4P ⁽²⁾		4P ⁽²⁾		4P ⁽²⁾		8P ⁽²⁾
27PV 3039	B5	27PV 8060	B6Ds	27DC 8081	B7Ds	27DC 8101 1000 A	B7Ds		
	3P ⁽²⁾		8P ⁽²⁾		8P ⁽²⁾		8P ⁽²⁾		
27PV 4039	B5	27PV 8060	B6Ds	27DC 8081	B7Ds	27DC 8101 1000 A	B7Ds		
	2P ⁽²⁾		4P ⁽²⁾		4P ⁽²⁾		4P ⁽²⁾		
27PV 6039 350 A B5Ds									
	3P ⁽²⁾								

ORDERING INFORMATION:

All references given above are for the SIRCO PV switch body only (Without accessories and without the operating handle).
When ordering please make sure to specify a kit reference to define a Direct handle (2XP1 XXXX A) or External handle (2XP2 XXXX A).

Example for switch type 26PV 2010 A:

The Direct handle kit reference including the SIRCO PV switch and the direct handle is 26P1 2010 A.

The External handle kit reference including the SIRCO PV switch, external shaft and the external handle is 26P2 2010 A.

The **PV** range

A complete offer of load break switches for photovoltaic applications from 25 to 3200 A

SIRCO MC PV from 25 up to 45 A - 1000 VDC

Compact

Thanks to its compact design, the limited space within the combiner box or the solar inverter maybe utilised better.

High breaking capacity up to 1000 VDC

- Making and breaking capacity under load conditions up to 1000 VDC.
- Specific photovoltaic test beyond IEC 60947-3 standard requirements.
- Compliant with UL 508i.

Safety

- Pre-bridging is factory installed for easier, quicker and safer connection.
- Direct access to connection terminals for adequate tightening.

Easy mouting

Three mounting possibilities are available for optimum integration and time saving.

- DIN rail or back plate mounting.
- Door mounting.
- Quick Fix mounting to save time when integrating into solar inverters.

Multi-circuit breaking

The SIRCO MC PV for double circuits enables connection of two independent PV panel strings to a single switch. This will reduce the cost of the overall solution.



SIRCO MOT PV up to 3200 A - up to 1500 VDC

Main characteristics

- Up to 1500 VDC.
- 2 stable positions (I, 0).
- AUTO/MANU selector.
- Padlocking in 0 position.
- Full range of accessories.

Remote disconnection system

With its remote motorised control, the SIRCO MOT PV can be utilised to provide safety disconnection for firefighters by meeting the remote disconnection requirements of the installation.

Manual emergency operation

In addition to its motorised operation, the SIRCO MOT PV also includes a manual operation facility, enabling the switch position to be changed on load in a safe and easy way.



INOSYS **LBS** Load Break Switches incorporating tripping function from 160 to 1250 A, up to 1500 VDC

INOSYS LBS are multiple pole load break switches that have been specifically designed for PV applications that require a tripping function. They can be operated manually using the handle or remotely via tripping coils to disconnect part or all of the electrical installation.

They make and break under load conditions and provide safety isolation for any low voltage circuits up to 1500 VDC and are suitable for emergency switching.

To meet the requirements of harsh PV environments, the INOSYS LBS can be easily integrated in any location of the PV installation (combiner box, recombiner box or inverter) and are also particularly suitable for safety applications such as firefighter switches.

It's the right choice for PV and DC distribution applications that require a high reliability and low maintenance trip function through a shunt trip coil or an undervoltage release.



INOSYS 003 A



INOSYS 002 A



Also available

SIRCO

Load break switches for power distribution

- From 63 to 5000 A.
- Up to 690 VAC - AC23.
- Reliability and performance.
- Simplicity.
- Easy to install.



SIRCO-AC 001 A

ATyS

Remotely operated and automatic transfer switching equipment

- from 125 to 3200 A
- plug & play solution
- manual emergency control
- easy maintenance
- compliant with IEC 60947-6-1 & IEC 60947-3



ATyS-P 001 B

DIRIS

Multifunction meters

- Monitor all electrical parameters of the installation.
- Detects wiring errors.
- Compliant with IEC 61557-12 UL 61010-1.



DIRIS 744 A



Socomec worldwide

IN INDIA

CORPORATE OFFICE

B1, II Floor
Thiru-Vi-Ka Industrial Estate
Guindy, Chennai - 600 032
Tel: +91 44 3921 5400 / 5423 / 5466
Mob: +91 9711229993, +91 9790968731
Fax: +91 44 39215450
info.in@socomec.com

MANUFACTURING FACILITY

756 Pace City II
Sector 37
Gurgaon - 122 001
Haryana
Tel: +91 124 4562700, 4597803
Fax: +91 124 4562733
CIN: U00000HR1999PTC038504

BRANCH OFFICES

BANGALORE

160, Arun Arch, 2nd Floor
9th Cross, Indiranagar First Stage
Bangalore - 560 038
Tel: +91 80 41739101-03
Mob: +91 9972578171, +91 9886323448

COCHIN

47/590, Mattathumkattil
Narayanan Asan Road
Ponnurrunni, Vyttila
Cochin - 682019
Mob: +91 9745012322, +91 8939550688

COIMBATORE

12, 3rd Cross Street
Lakshmipuram, Ganapathy
Coimbatore - 641 006
Mob: +91 8939550688, +91 9003032012

HYDERABAD

3rd Floor
6-3-652/K/12, KAUTILYA Complex
Somajiguda
Hyderabad - 500 082
Mob: +91 9959444277, +91 9642528800

KOLKATA

AK-257, Sector-2
Salt Lake City, Kolkata - 700091
Mob: +91 9836405558, +91 8697709095

MUMBAI

Office No.404, 4th Floor
"C" Wing, Neelkanth Business Park
Nr. Vidyavihar Station, Vidyavihar (W)
Mumbai - 400 086
Tel: +91 9987052602, +91 9167542007

NEW DELHI

Plot No 100, 1st Floor
Okhla Industrial Estate Phase III
New Delhi - 110020
Tel: +91 11 40884000
Mob: +91 9958595941, +91 9953595413

PUNE

Plot No. 30, Wireless
Co-operative Society
Behind Convergys, Aundh
Pune 411 007
Telefax: +91 20 25881587
Mob: +91 9987052604, +91 9423204106

RESIDENT OFFICES

AHMEDABAD

+91 9727753931
+91 9376639333

CHANDIGARH

+91 9023154784

TRIVANDRUM

+91 9020179364

VADODARA

+91 9099947988

IN EUROPE

BELGIUM

FRANCE

GERMANY

ITALY

NETHERLANDS

POLAND

PORTUGAL

ROMANIA

SLOVENIA

SPAIN

SWITZERLAND

UNITED KINGDOM

TURKEY

IN ASIA PACIFIC

AUSTRALIA

CHINA

SINGAPORE

THAILAND

IN MIDDLE EAST

UNITED ARAB EMIRATES

IN AMERICA

USA, CANADA & MEXICO

OTHER COUNTRIES

www.socomec.co.in/worldwide

HEAD OFFICE

SOCOMECS GROUP

SAS SOCOMECS capital 10 686 000 €
R.C.S. Strasbourg B 548 500 149
B.P. 60010 - 1, rue de Westhouse
F-67235 Benfeld Cedex - FRANCE
Tel. +33 3 88 57 41 41
Fax +33 3 88 74 08 00
info.scp.isd@socomec.com

YOUR DISTRIBUTOR / PARTNER

www.socomec.co.in

your energy
our expertise



socomec
Innovative Power Solutions