



ATyS S - ATyS d S

Remotely operated transfer switching equipment
from 40 to 125 A

Transfer switches



atys-s_018_a

The solution for

- > Genset < 90 kVA
- > Heating systems
- > Climate control
- > Ventilation systems
- > Telecommunications



Strong points

- > Extensive power supply range
- > Safety and reliability
- > Easy integration
- > Simplified maintenance
- > ATyS d S: Dual power supply

Conformity to standards

- > IEC 60947-6-1
- > IS/IEC 60947-3
- > GB 14048-11



Approvals and certifications



Function

ATyS S products are 4 pole remotely operated transfer switches with positive break indication. They enable the on-load transfer of two three-phase supplies via remote volt-free contacts, from either an external automatic controller, using pulse logic, or a switch. They are intended for use in low voltage power supply systems where a brief interruption of the load supply is acceptable during transfer.

Advantages

Extensive power supply range

The ATyS S is available in four supply versions, each with a broad range (+/-30%). The four versions are:

- 12 VDC power supply.
- 24/48 VDC power supply.
- 230 VAC single power supply.
- 2 x 230 VAC dual power supply.

Safety and reliability

ATyS S products use stable position technology, ensuring constant pressure on the contacts and preventing premature aging. In addition, they do not require a power supply to maintain position, thus protecting their loads from voltage fluctuations.

Easy integration

ATyS S products can be easily installed inside enclosures. Their design, and in particular their compact size, enables integration within most 200 mm deep enclosures.

Simplified maintenance

Maintenance can be carried out easily under load, with manual operation still available. The control and motorisation section can be replaced simply by removing 4 screws, with no work required on the installation cabling.

ATyS d S: Dual power supply

In addition to the functions offered by the ATyS S, the ATyS d S incorporates supply redundancy without the need for additional wiring. This is obtained by integrating a double supply (2 independent supplies) directly within the product.

References

ATyS S - ATyS d S

Rating (A)	No. of poles	Power supply	ATyS S - ATyS d S + bridging bars	Terminal shrouds	Voltage tap	Terminal retainer	DIN rail
40 A	4 P	12 VDC	9505 4004SL	Source side 2 pieces 9594 4012A Load side 2 pieces 9594 9012A	9599 4001G	2 pieces 9599 4003G	4 modules 9599 4002G
	4 P	230 VAC	9503 4004SL				
	4 P	2 x 230 VAC	9513 4004SL				
63 A	4 P	12 VDC	9505 4006SL		9599 4001G		
	4 P	230 VAC	9503 4006SL				
	4 P	2 x 230 VAC	9513 4006SL				
80 A	4 P	12 VDC	9505 4008SL		9599 4001G		
	4 P	230 VAC	9503 4006SL				
	4 P	2 x 230 VAC	9513 4006SL				
100 A	4 P	12 VDC	9505 4010SL		9599 4001G		
	4 P	230 VAC	9503 4006SL				
	4 P	2 x 230 VAC	9513 4006SL				
125 A	4 P	12 VDC	9505 4012SL	9599 4001G			
	4 P	230 VAC	9503 4012SL				
	4 P	2 x 230 VAC	9513 4012SL				

Accessories

Voltage tap

Use

Enables the required power supply for ATyS S 230 VAC and ATyS d S products to be tapped directly from the product's incoming power terminals. Can also be utilised in applications without neutral, to provide 400 VAC to the autotransformer.

Rating (A)	Reference
40 ... 125	9599 4001G



atys-s_022_a

Terminal retainer

Use

These clips have a dual function: - to prevent direct access to the power supply and control terminals and - to secure these connector terminals.

Rating (A)	Pack	Reference
40 ... 125	2 pieces	9599 4003G



atys-s_021_a

Terminal shrouds

Use

IP2X protection against direct contact with terminals or connecting parts.

Terminal shrouds for the source side

Rating (A)	Pack	Reference
40 ... 125	2 pieces	9594 4012A

Terminal shrouds for the load side

Rating (A)	Pack	Reference
40 ... 125	2 pieces	9594 9012A



atys-s_020_a

atys-s_020_a

Autotransformer 400/230 VAC

Use

For applications without neutral, this autotransformer provides the 230 VAC required to power these ATyS products.

Dimensions

75 x 80 x 72 mm

Rating (A)	Reference
40 ... 125	9599 4004G

ATyS S - ATyS d S

Remotely operated transfer switching equipment
from 40 to 125 A

Accessories (continued)

DIN rail

Use

This 4-module DIN rail can be installed directly on the front of the ATyS S and can be utilised, for example, for the installation of a surge protection device.

Rating (A)	Reference
40 ... 125	9599 4002G



access_417_a_1_cat

Manual emergency operation handle

Use

This handle can be used on the product whether the motor unit is mounted or not.

Rating (A)	Reference
40 ... 125	9599 5012G



poign_058_a_1_x_cat

Connector kit

Use

This kit, which includes all of the ATyS S connectors, can be ordered to replace any lost or broken terminal connectors.

Rating (A)	Reference
40 ... 125	9509 0002G



access_416_a_1_cat

Characteristics according to IEC 60947-3 and IEC 60947-6-1

40 to 125 A

Thermal current I_{th} at 40°C	40 A	63 A	80 A	100 A	125 A	
Rated insulation voltage U_i (V) (power circuit)	800	800	800	800	800	
Rated impulse withstand voltage U_{imp} (kV) (power circuit)	6	6	6	6	6	
Rated insulation voltage U_i (V) (control circuit)	300	300	300	300	300	
Rated impulse withstand voltage U_{imp} (kV) (control circuit)	4	4	4	4	4	
Rated operational currents I_e (A) according to IEC 60947-6-1						
Rated voltage	Utilisation category	A/B	A/B	A/B	A/B	
415 VAC	AC-31 B	40	63	80	100	125
415 VAC	AC-32 B	40	63	80	80	80
Rated operational currents I_e (A) according to IEC 60947-3						
Rated voltage	Utilisation category	A/B	A/B	A/B	A/B	
415 VAC	AC-20 A / AC-20 B	40/40	63/63	80/80	100/100	125/125
415 VAC	AC-21 A / AC-21 B	40/40	63/63	80/80	100/100	100/125
415 VAC	AC-22 A / AC-22 B	40/40	63/63	80/80	100/100	100/100
415 VAC	AC-23 A / AC-23 B	-/40	-/63	-/63	-/63	-/63
Fuse protected short-circuit withstand (kA rms prospective)						
Prospective short-circuit current (kA rms)	50	50	50	25	15	
Associated fuse rating (A)	40	63	80	100	125	
Short-circuit capacity as per IEC 60947-6-1						
Rated short-time withstand current 0.03 s. (kA)	5	5	5	5	-	
Rated short-circuit making capacity I_{cm} (kA peak)	7.65	7.65	7.65	7.65	-	
Short-circuit capacity as per IEC 60947-3 (without protection)						
Rated short-time withstand current 1 s. I_{cw} (kA rms)	2.5	2.5	2.5	2.5	2.5	
Rated short-time withstand current 0.3s I_{cw} (kA rms) ⁽¹⁾	3.5	3.5	3.5	3.5	3.5	
Rated peak withstand current (kA peak)	12	12	12	12	12	
Connection						
Maximum Cu cable cross-section (mm ²)	50	50	50	50	50	
Tightening torque mini / maxi (Nm)	1.2/3	1.2/3	1.2/3	1.2/3	1.2/3	
Switching time (Standard setting)						
I - 0 or II - 0 (ms)	500	500	500	500	500	
I - II or II - I (ms)	1000	1000	1000	1000	1000	
Duration of "electrical blackout" I - II (ms) minimum	500	500	500	500	500	
Power supply						
Power supply 12 VDC min / max (VDC)	9/15	9/15	9/15	9/15	9/15	
Power supply 230 VAC min / max (VAC)	160/310	160/310	160/310	160/310	160/310	
Control supply power demand						
Power supply 12 VDC inrush / nominal (VA)	200/40	200/40	200/40	200/40	200/40	
Power supply 230 VAC inrush / nominal (VA)	200/40	200/40	200/40	200/40	200/40	
Mechanical characteristics						
Durability (number of operating cycles)	25 000	25 000	25 000	25 000	25 000	
Weight ATyS S and ATyS d S 4 P (kg)	3	3	3	3	3	

⁽¹⁾ Value for coordination with any circuit breaker that ensures tripping in less than 0.3s. For coordination with specific circuit-breaker references, higher short-circuit current values are available. Please consult us.


ATyS S - ATyS d S

Remotely operated transfer switching equipment

from 40 to 125 A


Terminals and connections

ATyS S DC version

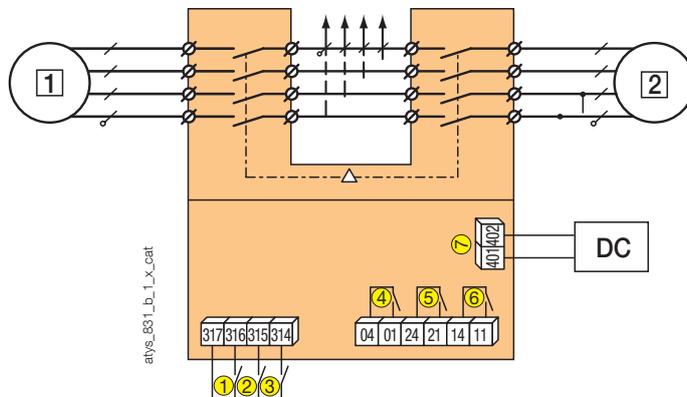


- 1 preferred source
- 2 alternate source
- 1: position 0 control
- 2: position I control
- 3: position II control
- 4: auxiliary contact, closed when the switch is in position 0
- 5: auxiliary contact, closed when the switch is in position II
- 6: auxiliary contact, closed when the switch is in position I
- 7: power supply :12 VDC (9-15 VDC).

ATyS S: 230 VAC

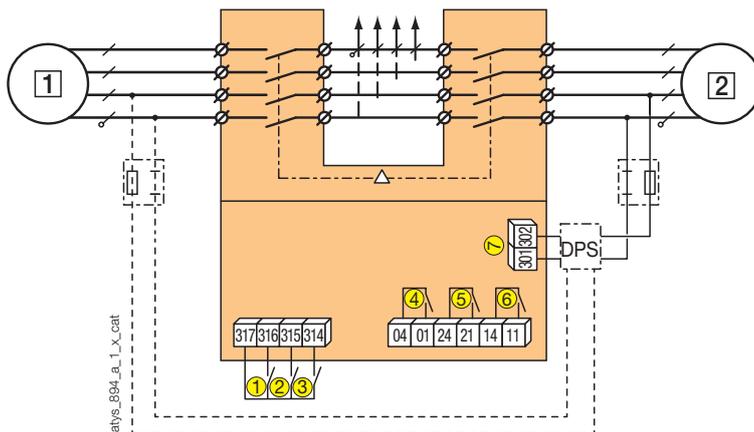

- 1 preferred source
- 2 alternate source
- 1: position 0 control
- 2: position I control
- 3: position II control
- 4: auxiliary contact, closed when the switch is in position 0
- 5: auxiliary contact, closed when the switch is in position II
- 6: auxiliary contact, closed when the switch is in position I
- 7: power supply: 230 VAC (160-310 VAC)

ATyS d S: 2 x 230 VAC

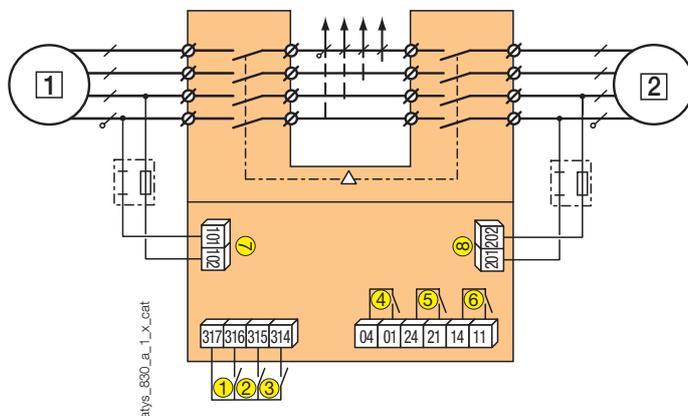

- 1 preferred source
- 2 alternate source
- 1: position 0 control
- 2: position I control
- 3: position II control
- 4: auxiliary contact, closed when the switch is in position 0
- 5: auxiliary contact, closed when the switch is in position II
- 6: auxiliary contact, closed when the switch is in position I
- 7: power supply I: 230 VAC (160-310 VAC)
- 8: power supply II: 230 VAC (160-310 VAC)

Includes a built-in dual power supply.

