



NETYS PR

Space saving reliable protection
from 1000 to 2000 VA - Mini Tower

Single-phase UPS



NETYS PR
1000 VA

NETYS PR
1500/2000 VA

The solution for

- > Professional and IT equipment
- > Servers and networking devices
- > CAD / graphic workstations with monitors and peripherals
- > Control systems

Technology

- > VI "line interactive" with AVR, sine wave

Certifications



Professional line interactive UPS

- Ideal solution for protecting small servers and high performance CAD or graphic workstations.
- Assures service continuity to critical applications.
- Designed for professional applications: the sine wave inverter technology assures full compatibility with any kind of load and power supply.
- Minitower case to easily fit close to the IT load to be supplied and protected.

A solution for network power cuts and voltage fluctuations

- The integrated AVR function (Automatic Voltage Regulation) stabilizes the output voltage and avoids the switching to Battery Mode operation, therefore saving the battery to support critical power cut events.

Easy to use

- Control panel with graphical icons LCD allowing the operating mode to be easily monitored.

Simplified connection


- Several IEC 320 sockets (IT standard) simplify the connectivity to computer and IT peripherals.

Protection for your data line

- Integrated NTP protection for LAN/ADSL connection against the risk of data line overvoltage.

Some models may not be available in your country – please check with your local sales office.

Connections

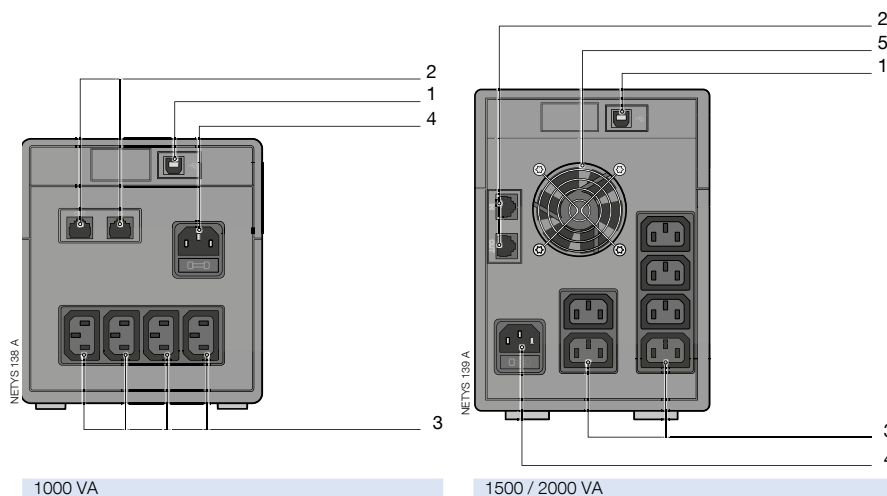


1000 VA

1500 / 2000 VA

1. USB serial port
2. NTP data line suppressor
3. UPS output sockets

4. Input socket and fuse
5. Fan / air vents

Control panel

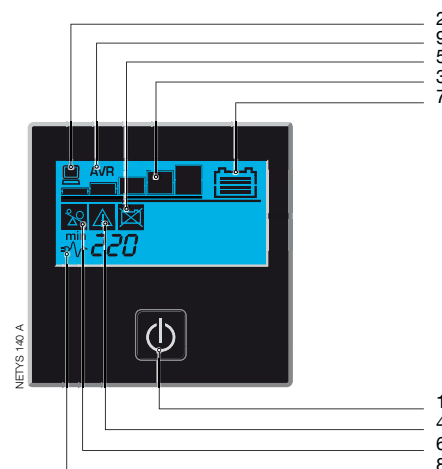

1. On / Off
2. Load present
3. Load level (5 steps)
4. General Alarm
5. Battery fault / Replace the battery
6. Overload
7. Battery capacity
8. Normal mode / Battery mode (flashing)
9. Automatic Voltage / Regulation active

Technical data

NETYS PR Mini Tower			
Sn	1000 VA	1500 VA	2000 VA
Pn	700 W	1050 W	1400 W
Input/output	1/1		
INPUT			
Rated voltage	230 V		
Voltage tolerance	170 - 280 V		
Rated frequency	50/60 Hz with automatic selection		
Mains connection	IEC320 socket		
OUTPUT			
Automatic Voltage Regulation (AVR)	•	•	•
Rated voltage	230 V ±10%		
Rated frequency	50/60 Hz ±1%		
Wave form	Sine wave		
Protection	Overload, significant discharge and short circuit		
Connections	4 x IEC 320 (C13)	6 x IEC 320 (C13)	
BATTERIES			
Type	Sealed lead-acid maintenance free - expected life 3/5 years		
Back-up time ⁽¹⁾	45 min	55 min	60 min
COMMUNICATION			
Interfaces	USB		
Local communication software	Local View		
Data Line protection	NTP data line suppressor		
UPS CABINET			
Dimensions W x D x H	145 x 345 x 165 mm	145 x 390 x 205 mm	
Weight	9.2 kg	12.3 kg	13.2 kg
STANDARDS			
Safety	IEC/EN 62040-1, AS 62040.1.1, AS 62040.1.2		
EMC	IEC/EN 62040-2, AS 62040.2		
Product declaration	CE, RCM (E2376)		

(1) PC + 17" LCD monitor.

Standard communication features

- LOCAL VIEW: ideal UPS monitoring and shutdown point-to-point solution for Windows®, Linux and Mac OS X® operating systems.