




ATyS g

Automatic Transfer Switching Equipment from 125 to 3200 A

Transfer switches

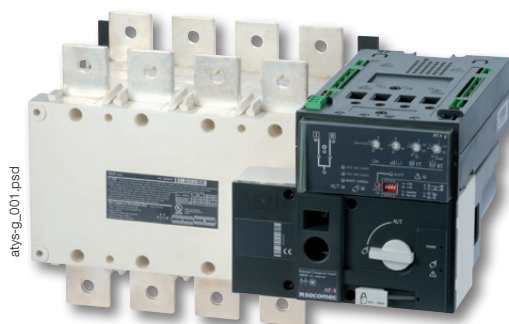

Function

ATyS g are 3 or 4 pole automatic transfer switches, with positive break indication. They incorporate all the functions offered by the ATyS r, as well as functions intended for **mains/mains** and **mains/genset** applications.

In automatic mode they enable the monitoring of, and the on-load changeover between, two power supply sources, in accordance with the parameters configured via potentiometers and DIP switches. Remote monitoring of the ATyS g is possible with the optional RS485 communication module.

They are intended for use in low voltage power supply systems where a brief interruption of the load supply is acceptable during transfer.

Advantages

Rapid commissioning

ATyS g switches offer significant time saving during commissioning (process takes 2 to 3 minutes). Owing to the design that allows commissioning through just four potentiometers and four DIP switches, a screwdriver is all that is required to configure the parameters.

For added simplicity, they also offer an autoconfiguration function which enables automatic adjustment of the rated voltage and frequency.

Specifically designed for mains/mains and mains/genset applications

The ATyS g's integrated controller has been designed to provide specific functions for these applications (genset startup, on-load or off-load tests...) together with the monitoring of the voltage and frequency of both sources for three-phase and single-phase networks.

The generator supply must be connected to switch II, located at the rear.

RS485 communication

An optional RS485 communication module (p/n 4825 0092) can be fitted to the ATyS g controller.

It allows remote monitoring of available power sources and their parameters, timers, as well as displaying the product's status and configuration.

Communication speed is up to 38400 bauds.

The solution for

- > Mains/mains and mains/genset applications



Strong points

- > Rapid commissioning
- > ATS with integrated DPS and controller for functions dedicated to mains/mains or mains/genset applications

Conformity to standards

- > IEC 60947-6-1
- > IEC 60947-3
- > GB/T 14048.11



Approvals and certifications⁽¹⁾



BUREAU
VERITAS



⁽¹⁾ Product references on request.

Enclosed RTSE



See "Enclosed transfer switches".

References

ATyS g

Rating (A) / Frame size	No. of poles	ATyS g+ Bridging bars	Voltage sensing and power supply kit	Terminal shrouds ⁽²⁾	Terminal screens	Auxiliary contact
125 A / B3	4 P	9553 4012SLVR	1559 4012	2694 4014	1509 4012	1599 0502
160 A / B3	4 P	9553 4016SLVR				
200 A / B3	4 P	9553 4020SLVR				
250 A / B4	4 P	9553 4025SLVR	1559 4025	2694 4021	1509 4025	
315 A / B4	4 P	9553 4031SLVR	1559 4040			
400 A / B4	4 P	9553 4040SLVR				
500 A / B5	4 P	9553 4050SLVR	1559 4063	2694 4051	1509 4063	
630 A / B5	4 P	9553 4063SLVR				
800 A / B6	4 P	9553 4080SLVR	1559 4080	-	1509 4080	1599 0532
1000 A / B6	4 P	9553 4100SLVR				
1250 A / B6	4 P	9553 4120SLVR	1559 4120			
1600 A / B7	4 P	9553 4160SLVR	1559 4160		1509 4160	
2000 A / B8	4 P	9553 4200G	1559 4200		1509 4200	included
2500 A / B8	4 P	9553 4250G				
3200 A / B8	4 P	9553 4320G				

(1) For complete shrouding at front, rear, top and bottom, order quantity 4; if equipped with bridging bars order quantity 3. For top and bottom shrouding for the front only, order quantity 2.